


Dosing station for highest hygiene requirements

- Stainless steel housing with hygienic design
- Automatic operation (24/7) via timer, individually adjustable
- LED status indicator
- Flexible dosing volume adjustable

Process-safe separation between
low-care and high-care areas
through ProfilGate® aqua



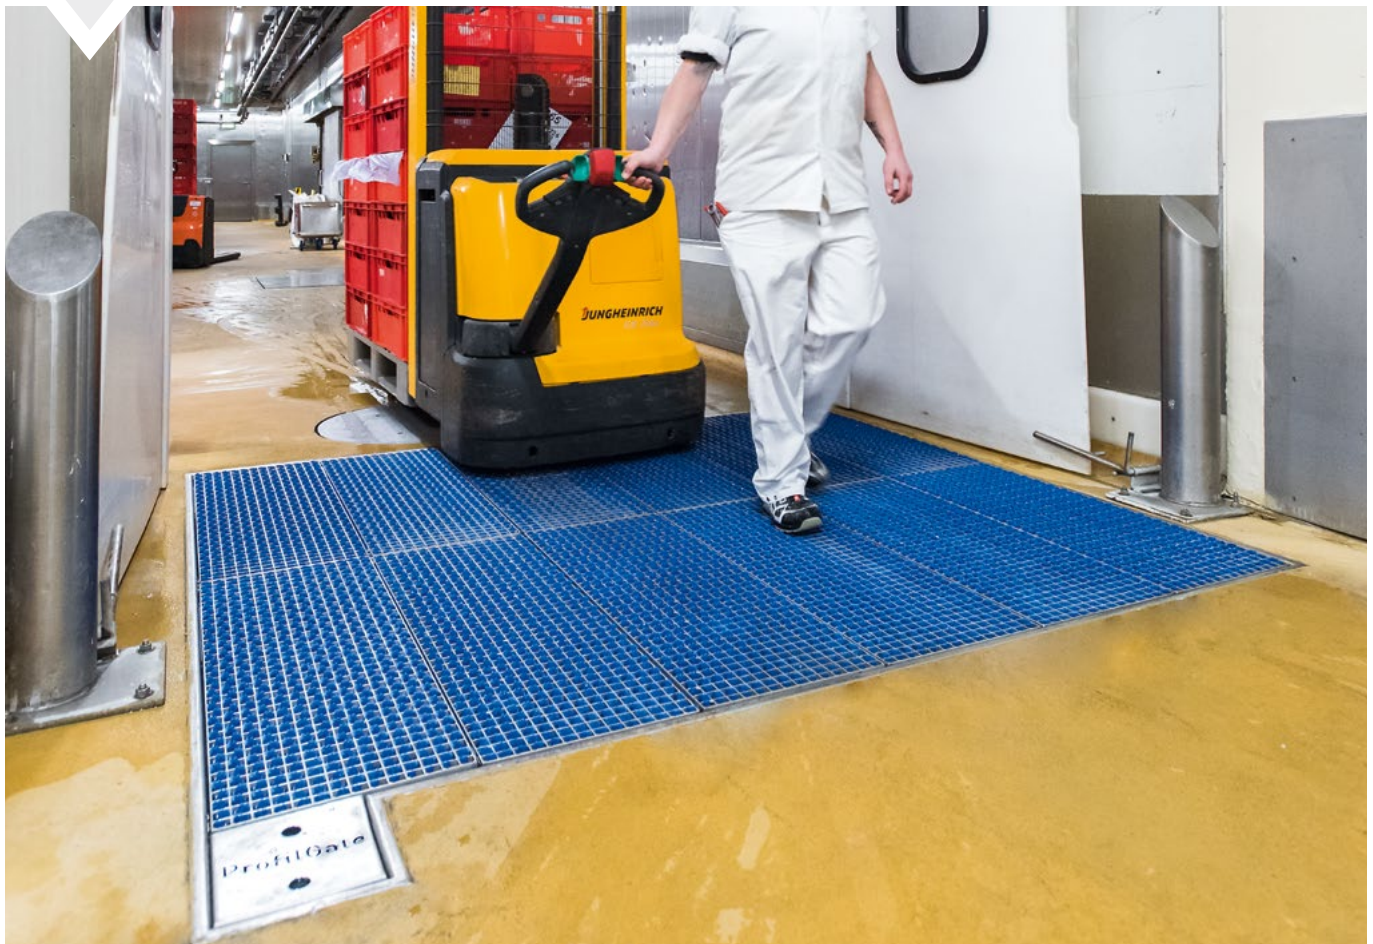

Technical data	ProfilGate® aqua dosing station Art.-no. 005-9600F
Dimensions (W x H x D mm)	300 x 380/450 x 200
Weight (kg)	9,8
Material	V2A 1.4301
Min./max. water pressure (bar)	2,5 - 6,0
Max. Water temperature (°C)	70
Power connection	230 V AC, 50 Hz
IP protection class	IP 54
Input fuse (A)	2,5 A mt
Mixing ratio via Venturi valve	min. 0.2% / max. 16.0%
Water inlet	1/2"
Filling	1/2"
Power consumption (kW)	0,1

